

# Keysight Technologies

## M9420A VXT PXIe Vector Transceiver

60 MHz to 3.8, or 6 GHz

Data Sheet



# Table of Contents

Overview .....	3
Technical specifications .....	4
Vector signal analyzer performance .....	5
Vector signal generator performance .....	11
General specifications .....	15
Front panel .....	15
System requirements .....	16
Application specifications .....	16
N9071A GSM/EDGE/Evo measurement application key specifications .....	16
GSM/EDGE/Evo source key specifications .....	17
N9073A W-CDMA/HSPA+ measurement application key specifications .....	17
W-CDMA/HSPA+ source key specifications .....	18
N9072A cdma2000® measurement application and N9076A 1xEV-DO measurement application key specifications .....	21
cdma2000 and 1xEV-DO source key specifications .....	21
N9080B LTE/LTE-Advanced FDD & N9082B LTE/LTE-Advanced TDD measurement application key specifications .....	21
LTE source key specifications .....	22
N9081A <i>Bluetooth</i> ® measurement application key specifications .....	22
<i>Bluetooth</i> source key specifications .....	22
N9079A TD-SCDMA measurement application key specifications .....	23
TD-SCDMA source key specifications .....	23
N9077A WLAN measurement application key specifications .....	23
WLAN source key specifications .....	25
Software .....	26
Related literature .....	27
Web .....	27

## Overview

### Compress time, compress test

The best solution for a specific problem is a focused tool you simply fine-tune. Keysight's M9420A PXIe vector transceiver (VXT) is purpose-built for rapid solution creation and faster throughput in manufacturing test of wireless components and Internet-of-Things (IoT) devices. With FPGA-accelerated measurements and deep software, the ready-to-run VXT lets you start closer to your finish line.

### Product description

The M9420A VXT is a four-slot PXIe vector signal generator and analyzer, ranging from 60 MHz to 3.8 or 6 GHz with modulation and analysis bandwidth up to 160 MHz. Up to four VXT's can be configured in a single 18-slot PXI chassis, with only a single M9300A frequency reference required. Alternatively, a versatile single-chassis custom solution can be created from Keysight's modular portfolio, dramatically reducing test footprint.

### Applications

- Power amplifier and front-end-module design validation and manufacturing
- Radio transceiver design validation and production test
- Development, design validation, and manufacturing test for radios and other IoT connected devices

### Reference solutions

Application-specific reference solutions, a combination of recommended hardware, software, and measurement expertise, provide the essential components of a test system. The following reference solutions include the M9420A PXIe VXT vector transceiver as a hardware component:

- RF power amplifier/front end module characterization and test, Reference Solution for the industry's fastest power amplifier test solution including rapid waveform download, tight synchronization, automated calibration, and FPGA-accelerated power servo and fast power measurements. For more information, see [www.keysight.com/find/solution-padv](http://www.keysight.com/find/solution-padv)



M9420A VXT PXIe vector transceiver placed inside the M9018A PXIe chassis

## Technical Specifications

### Definitions and conditions

Specifications describe the warranted performance of calibrated instruments. Data represented in this document are specifications under the following conditions unless otherwise noted.

- Specifications are valid from 40 to 65 °C for individual module temperature, as reported by the module, and 20 to 35 °C for environment temperature unless otherwise noted
- Calibrated instrument has been stored for a minimum of 2 hours within the allowed operating range
- If instrument has previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range, instrument must have been stored for a minimum of 2 hours within the allowed operating range before turn-on
- 45-minute warm-up time
- Calibration cycle maintained
- The RF, IF, and Source Alignments have been run within the previous 7 days
- An ALL Alignment has been run:
  - Within the previous 8 hours
  - If the temperature has changed more than 5 °C from the previous "ALL" alignment

**Typical** describes additional product performance information. It is performance beyond specifications that 95 percent of the units exhibit with a 95 percent confidence level. This data, shown in italics, does not include measurement uncertainty, and is valid only at room temperature (approximately 25 °C) after alignment within the stated alignment time and temperature limits.

**Nominal** values indicate expected performance, or describe product performance that is useful in the application of the product.

### Recommended best practices in use

- Use slot blockers and EMC filler panels in empty module slots to ensure proper operating temperatures. Keysight chassis and slot blockers optimize module temperature performance and reliability of test.
- Set chassis fan to high at environmental temperatures above 45 °C.

## Vector Signal Analyzer Performance

<b>Performance</b>		
<b>Capture depth</b>		
Standard	256 MSa of IQ data	
Option M9420A-M05	512 MSa of IQ data	
<b>Frequency and time specifications</b>		
<b>Frequency range</b>		
Option M9420A-504	60 MHz to 3.8 GHz	
Option M9420A-506	60 MHz to 6 GHz	
<b>Frequency reference</b>		
Accuracy, aging rate, stability	refer to M9300A specifications	
<b>CW measurement frequency accuracy</b>		
Accuracy	(Transmitter frequency x frequency reference accuracy) ± 50 Hz typically	
Resolution	1 Hz typical	
<b>Analysis bandwidth</b>		
Maximum bandwidth		
Standard	60 to 70 MHz	20 MHz
	70 to 230 MHz	40 MHz
	230 to 400 MHz	40 MHz
	400 MHz to 6 GHz	40 MHz
Option M9420A-B80	60 to 70 MHz	20 MHz
	70 to 230 MHz	40 MHz
	230 to 400 MHz	80 MHz
	400 MHz to 6 GHz	80 MHz
Option M9420A-B1X	60 to 70 MHz	20 MHz
	70 to 230 MHz	40 MHz
	230 to 400 MHz	80 MHz
	400 MHz to 6 GHz	160 MHz
<b>Triggering</b>		
Trigger	Free run, external 1, external 2, RF burst, video, line, periodic	
IQ analyzer		
Trigger delay range	-15 to 500 ms	
Resolution	0.1 µs	
<b>Amplitude accuracy and range specifications</b>		
<b>Maximum average power input</b>		
RF input port	+27 dBm	
Option M9420A-HDX, Half duplex port	+30 dBm	
Option M9420A-FDX, Full duplex port	+36 dBm	

**CW absolute amplitude accuracy**

RF input port (in specified frequencies)

Frequency Range	Input level $\leq -8$ dBm to $-70$ dBm	Input level $> -8$ dBm to $+24$ dBm
60 MHz to 230 MHz	$< \pm 0.55$ dB, $< \pm 0.20$ dB typical	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical
230 MHz to 380 MHz		
40 MHz BW	$< \pm 0.55$ dB, $< \pm 0.20$ dB typical	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
80 MHz BW	$< \pm 0.65$ dB, $< \pm 0.35$ dB typical	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical
380 MHz to 510 MHz		
40 MHz BW	$< \pm 0.50$ dB, $< \pm 0.15$ dB typical	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
80 MHz BW	$< \pm 0.65$ dB, $< \pm 0.35$ dB typical	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical
160 MHz BW	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
510 MHz to 820 MHz		
40 MHz BW	$< \pm 0.45$ dB, $< \pm 0.20$ dB typical	$< \pm 0.55$ dB, $< \pm 0.30$ dB typical
80 MHz BW	$< \pm 0.55$ dB, $< \pm 0.20$ dB typical	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical
160 MHz BW	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical
820 MHz to 1000 MHz		
40 MHz BW	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.50$ dB, $< \pm 0.30$ dB typical
80 MHz BW	$< \pm 0.45$ dB, $< \pm 0.15$ dB typical	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical
160 MHz BW	$< \pm 0.50$ dB, $< \pm 0.15$ dB typical	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical
1000 MHz to 2110 MHz		
40 MHz BW	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.65$ dB, $< \pm 0.35$ dB typical
80 MHz BW	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical	$< \pm 0.60$ dB, $< \pm 0.20$ dB typical
160 MHz BW	$< \pm 0.60$ dB, $< \pm 0.20$ dB typical	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical
2110 MHz to 3200 MHz		
40 MHz BW	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
80 MHz BW	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical	$< \pm 0.60$ dB, $< \pm 0.20$ dB typical
160 MHz BW	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical
3200 MHz to 3310 MHz		
40 MHz BW	$< \pm 0.65$ dB, $< \pm 0.25$ dB typical	$< \pm 0.70$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.25$ dB typical
160 MHz BW	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical	$< \pm 0.85$ dB, $< \pm 0.40$ dB typical
3310 MHz to 3620 MHz		
40 MHz BW	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical	$< \pm 0.65$ dB, $< \pm 0.35$ dB typical
80 MHz BW	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical	$< \pm 0.65$ dB, $< \pm 0.25$ dB typical
160 MHz BW	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
3620 MHz to 3900 MHz		
40 MHz BW	$< \pm 0.65$ dB, $< \pm 0.35$ dB typical	$< \pm 0.70$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.65$ dB, $< \pm 0.45$ dB typical	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical
160 MHz BW	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical	$< \pm 0.85$ dB, $< \pm 0.40$ dB typical
3900 MHz to 4500 MHz		
40 MHz BW	$< \pm 0.80$ dB, $< \pm 0.40$ dB typical	$< \pm 1.00$ dB, $< \pm 0.55$ dB typical
80 MHz BW	$< \pm 0.80$ dB, $< \pm 0.35$ dB typical	$< \pm 0.80$ dB, $< \pm 0.30$ dB typical
160 MHz BW	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical	$< \pm 0.80$ dB, $< \pm 0.35$ dB typical
4500 MHz to 6000 MHz		
40 MHz BW	$< \pm 0.90$ dB, $< \pm 0.40$ dB typical	$< \pm 1.00$ dB, $< \pm 0.55$ dB typical
80 MHz BW	$< \pm 0.80$ dB, $< \pm 0.35$ dB typical	$< \pm 0.80$ dB, $< \pm 0.35$ dB typical
160 MHz BW	$< \pm 0.80$ dB, $< \pm 0.35$ dB typical	$< \pm 0.80$ dB, $< \pm 0.35$ dB typical

Half duplex port, Option M9420A-HDX (in specified frequencies)		
Frequency range	Input level $\leq -8$ dBm to $-70$ dBm	Input level $> -8$ dBm to $+24$ dBm
60 MHz to 230 MHz	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
230 MHz to 380 MHz	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical
380 MHz to 510 MHz		
40 MHz BW	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
80 MHz BW	$< \pm 0.50$ dB, $< \pm 0.15$ dB typical	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical
160 MHz BW	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical
510 MHz to 820 MHz	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
820 MHz to 1000 MHz	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
1000 MHz to 2110MHz		
40 MHz BW	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical
80 MHz BW	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical
160 MHz BW	$< \pm 0.60$ dB, $< \pm 0.20$ dB typical	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical
2110 MHz to 3200 MHz		
40 MHz BW	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.65$ dB, $< \pm 0.25$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
160 MHz BW	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
3200 MHz to 3310 MHz		
40 MHz BW	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical	$< \pm 0.65$ dB, $< \pm 0.35$ dB typical
80 MHz BW	$< \pm 0.60$ dB, $< \pm 0.20$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
160 MHz BW	$< \pm 0.60$ dB, $< \pm 0.20$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
3310 MHz to 3620 MHz		
40 MHz BW	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
80 MHz BW	$< \pm 0.70$ dB, $< \pm 0.25$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
160 MHz BW	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
3620 MHz to 3900 MHz		
40 MHz BW	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
160 MHz BW	$< \pm 0.85$ dB, $< \pm 0.40$ dB typical	$< \pm 0.75$ dB, $< \pm 0.35$ dB typical
3900 MHz to 4500 MHz	$< \pm 0.85$ dB, $< \pm 0.35$ dB typical	$< \pm 0.90$ dB, $< \pm 0.50$ dB typical
4500 MHz to 6000 MHz	$< \pm 0.95$ dB, $< \pm 0.5$ dB typical	$< \pm 1.00$ dB, $< \pm 0.55$ dB typical

Full duplex port, option M9420A-FDX (in specified frequencies)		
Frequency range	Input level $\leq -8$ dBm to $-65$ dBm	Input level $> -8$ dBm to $+33$ dBm
60 MHz to 230 MHz	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical
230 MHz to 380 MHz	$< \pm 0.50$ dB, $< \pm 0.15$ dB typical	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical
380 MHz to 510 MHz	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical
510 MHz to 820 MHz	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical
820 MHz to 1000 MHz	$< \pm 0.50$ dB, $< \pm 0.30$ dB typical	$< \pm 0.60$ dB, $< \pm 0.20$ dB typical
1000 MHz to 2110MHz		
40 MHz BW	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.60$ dB, $< \pm 0.35$ dB typical
80 MHz BW	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical
160 MHz BW	$< \pm 0.65$ dB, $< \pm 0.20$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
2110 MHz to 3200 MHz		
40 MHz BW	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
160 MHz BW	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical	$< \pm 0.85$ dB, $< \pm 0.40$ dB typical
3200 MHz to 3310 MHz		
40 MHz BW	$< \pm 0.60$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.60$ dB, $< \pm 0.25$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
160 MHz BW	$< \pm 0.70$ dB, $< \pm 0.25$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
3310 MHz to 3620 MHz		
40 MHz BW	$< \pm 0.75$ dB, $< \pm 0.35$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.75$ dB, $< \pm 0.35$ dB typical	$< \pm 0.75$ dB, $< \pm 0.35$ dB typical
160 MHz BW	$< \pm 0.75$ dB, $< \pm 0.35$ dB typical	$< \pm 0.85$ dB, $< \pm 0.50$ dB typical
3620 MHz to 3900 MHz		
40 MHz BW	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
160 MHz BW	$< \pm 0.75$ dB, $< \pm 0.30$ dB typical	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical
3900 MHz to 4500 MHz		
40 MHz BW	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.70$ dB, $< \pm 0.35$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
160 MHz BW	$< \pm 0.90$ dB, $< \pm 0.35$ dB typical	$< \pm 0.75$ dB, $< \pm 0.40$ dB typical
4500 MHz to 6000 MHz		
40 MHz BW	$< \pm 1.00$ dB, $< \pm 0.55$ dB typical	$< \pm 0.80$ dB, $< \pm 0.40$ dB typical
80 MHz BW	$< \pm 0.75$ dB, $< \pm 0.35$ dB typical	$< \pm 0.80$ dB, $< \pm 0.40$ dB typical
160 MHz BW	$< \pm 0.90$ dB, $< \pm 0.50$ dB typical	$< \pm 0.80$ dB, $< \pm 0.40$ dB typical



<b>Input voltage standing wave ratio (VSWR)</b>	
RF input port (in specified frequencies)	
60 to 600 MHz	< 2.0:1 nominal
600 MHz to 3 GHz	< 1.5:1 nominal
3 to 4.2 GHz	< 1.7:1 nominal
4.2 to 6 GHz	< 1.9:1 nominal
Option M9420A-HDX, half duplex port (configured to input mode in specified frequencies)	
60 MHz to 3 GHz	< 1.4:1 nominal
3 to 6 GHz	< 1.6:1 nominal
Option M9420A-FDX, full duplex port (configured to input mode in specified frequencies)	
60 MHz to 3 GHz	< 1.4:1 nominal
3 to 6 GHz	< 1.5:1 nominal
<b>Spurious responses (in specified frequencies)</b>	
Residual responses in specified frequency ranges	
RF input port with analyzer range = 0 dBm	
60 MHz to 230 MHz	< -77 dBm typical
230 MHz to 3.3 GHz	< -90 dBm typical
3.3 to 3.9 GHz	< -80 dBm typical
3.9 to 6 GHz	< -87 dBm typical
Half duplex port with analyzer ranged to < -30 dBm	
60 MHz to 6 GHz	< -90 dBm typical
Full duplex port with analyzer ranged to < -30 dBm	
60 MHz to 3.9 GHz	< -100 dBm typical
3.9 GHz to 6 GHz	< -90 dBm typical
Other spurious, for offsets from 10 MHz up to half the maximum analysis bandwidth from the signal in specified frequency bands	
< -62 dBc typical with analyzer ranged to signal peak power level	
<b>Phase noise sidebands, (CF = 900 MHz)</b>	
10 kHz offset	< -107 dBc/Hz, < -111 dBc/Hz typical
1 MHz offset	< -129 dBc/Hz, < -132 dBc/Hz typical

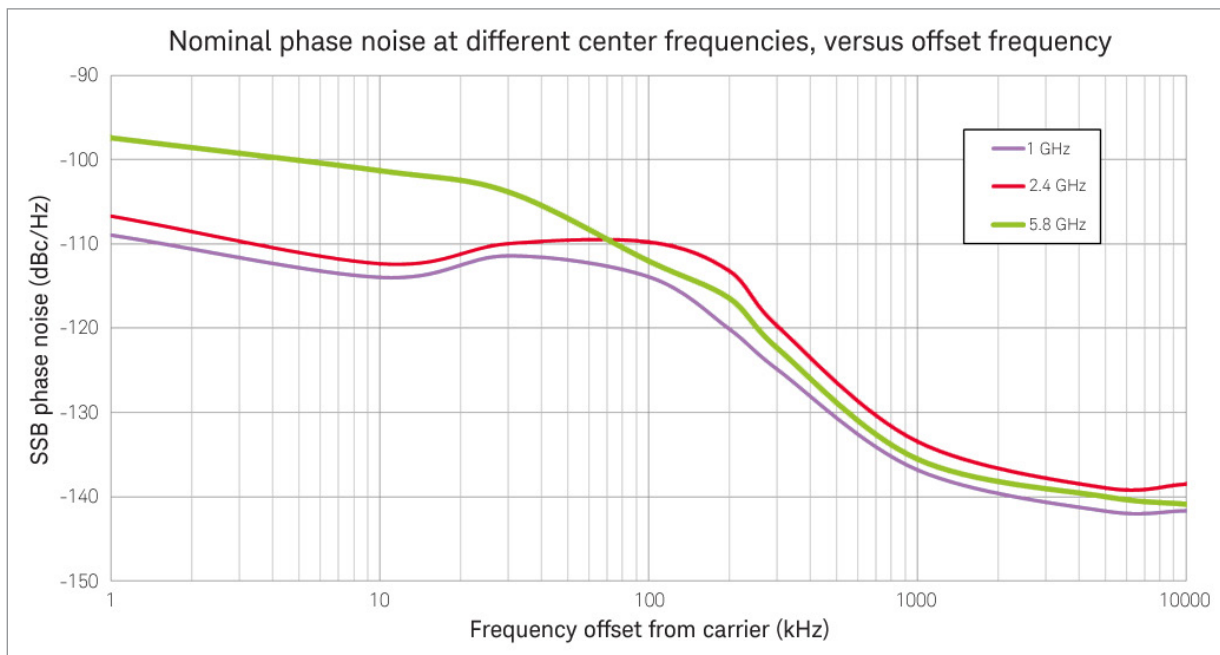


Figure 1. Nominal phase noise from 1 kHz to 10 MHz offset at 1, 2.4, and 5.8 GHz.

<b>Displayed average noise floor (DANL)<sup>1</sup></b>		
RF input port (in specified frequencies, with analyzer ranged to -70 dBm)		
60 to 380 MHz	-161 dBm, -165 dBm typical	
380 to 820 MHz	-160 dBm, -164 dBm typical	
820 MHz to 1 GHz	-159 dBm, -164 dBm typical	
1 to 2.11 GHz	-155 dBm, -160 dBm typical	
2.11 to 3.2 GHz	-152 dBm, -157 dBm typical	
3.2 to 3.31 GHz	-158 dBm, -162 dBm typical	
3.31 to 3.9 GHz	-156 dBm, -160 dBm typical	
3.9 to 4.5 GHz	-155 dBm, -159 dBm typical	
4.5 to 6 GHz	-152 dBm, -157 dBm typical	
Half duplex port, option M9420A-HDX (in specified frequencies, with analyzer ranged to -70 dBm)		
60 to 230 MHz	-157 dBm, -162 dBm typical	
230 to 820 MHz	-156 dBm, -161 dBm typical	
820 MHz to 1 GHz	-155 dBm, -160 dBm typical	
1 to 2.11 GHz	-152 dBm, -157 dBm typical	
2.11 to 3.2 GHz	-150 dBm, -154 dBm typical	
3.2 to 3.31 GHz	-154 dBm, -159 dBm typical	
3.31 to 3.62 GHz	-152 dBm, -157 dBm typical	
3.62 to 3.9 GHz	-153 dBm, -157 dBm typical	
3.9 to 4.5 GHz	-150 dBm, -156 dBm typical	
4.5 to 6 GHz	-148 dBm, -153 dBm typical	
Full duplex port, option M9420A-FDX (in specified frequencies, with analyzer ranged to -65 dBm)		
60 to 380 MHz	-150 dBm, -155 dBm typical	
380 to 510 MHz	-149 dBm, -154 dBm typical	
510 MHz to 820 MHz	-150 dBm, -154 dBm typical	
820 MHz to 1 GHz	-148 dBm, -153 dBm typical	
1 to 2.11 GHz	-144 dBm, -150 dBm typical	
2.11 to 3.2 GHz	-141 dBm, -147 dBm typical	
3.2 to 3.31 GHz	-147 dBm, -151 dBm typical	
3.31 to 3.62 GHz	-144 dBm, -148 dBm typical	
3.62 to 3.9 GHz	-145 dBm, -150 dBm typical	
3.9 to 4.5 GHz	-143 dBm, -148 dBm typical	
4.5 to 6 GHz	-139 dBm, -144 dBm typical	
<b>Third-order intermodulation distortion (TOI)</b>		
60 MHz to 6 GHz	+25 dBm nominal with analyzer ranged to 0 dBm +33 dBm nominal with analyzer ranged to +10 dBm	
<b>IF flatness</b>		
Center frequency (GHz)	Span (MHz)	Max. error (nominal)
≤ 6.0	≤ 160	± 0.30 dB

1. Input terminated, log power average, and normalized to 1 Hz bandwidth

## Vector Signal Generator Performance

<b>Performance</b>		
<b>Arb baseband bandwidth</b>		
Standard M9420A-B40	60 to 230 MHz	20 MHz
	230 to 340 MHz	40 MHz
	340 to 400 MHz	40 MHz
	400 to 6 GHz	40 MHz
Option M9420A-B80	60 to 230 MHz	20 MHz
	230 to 340 MHz	40 MHz
	340 to 400 MHz	80 MHz
	400 to 6 GHz	80 MHz
Option M9420A-B1X	60 to 230 MHz	20 MHz
	230 to 340 MHz	40 MHz
	340 to 400 MHz	80 MHz
	400 to 6 GHz	160 MHz
<b>Arb sample memory (storage capacity)</b>		
Standard	256 MSa of IQ data	
Option M9420A-M05	512 MSa of IQ data	
<b>Frequency specifications</b>		
<b>Frequency range</b>		
Option M9420A-504	60 MHz to 3.8 GHz	
Option M9420A-506	60 MHz to 6 GHz	
<b>Frequency reference</b>		
Accuracy, aging rate, stability	Refer to M9300A specifications	
<b>Frequency switching speed<sup>1</sup></b>		
Baseband frequency offset change <sup>2</sup>	$\leq 400 \mu\text{s}$ , nominal	
Arbitrary frequency change <sup>3</sup>	$\leq 2 \text{ ms}$ , nominal	

- Switching speed depends highly upon the hardware and controller that is used. Measurements were made with the M9420A in an M9018A chassis with the M9037A embedded controller.
- Mean time from IVI command until baseband frequency changed from 0 to 1 kHz
- Mean time from IVI command until RF frequency changed from 1.8 to 1.0 GHz

**Amplitude specifications****Settable range**

Standard	
RF output port	-150 to +10 dBm
Option M9420A-HDX	-150 to +10 dBm
Option M9420A-FDX	-150 to 0 dBm

Option M9420A-1EA	
RF output port	-150 to +18 dBm
Option M9420A-HDX	-150 to +15 dBm
Option M9420A-FDX	-150 to 0 dBm

**Output level range**

Standard	
RF output port	
60 MHz to 6 GHz	-130 to +10 dBm

Option M9420A-HDX (configured to output mode)	
60 MHz to 6 GHz	-130 to +5 dBm (-130 to +10 dBm CW typical)

Option M9420A-FDX full duplex port	
60 MHz to 3.9 GHz	-130 to -15 dBm (-130 to -5 dBm CW typical)
3.9 to 6 GHz	-120 to -20 dBm (-130 to -10 dBm CW typical)

Option M9420A-1EA	
RF output port	
60 MHz to 3.9 GHz	-130 to +18 dBm
3.9 GHz to 6 GHz	-130 to +18 dBm

Option M9420A-HDX (configured to output mode)	
60 MHz to 6 GHz	-130 to +5 dBm (-130 to +15 dBm CW typical)

Option M9420A-FDX full duplex port	
60 MHz to 3.9 GHz	-130 to -15 dBm (-130 to -5 dBm CW typical)
3.9 to 6 GHz	-120 to -15 dBm (-130 to -10 dBm CW typical)

**Amplitude switching speed<sup>1</sup>**

Baseband power level change <sup>2</sup>	$\leq 400 \mu\text{s}$ , nominal
Arbitrary power level change <sup>3</sup>	$\leq 2 \text{ ms}$ , nominal

1. Switching speed depends highly upon the hardware and controller that is used. Measurements were made with the M9420A in an M9018A chassis with the M9037A embedded controller.
2. Mean time from IVI command until baseband amplitude changed by 5 dB
3. Mean time from IVI command until RF amplitude changed from 0 to -10 dBm

**Absolute level accuracy (specified frequencies, CW)**

## RF output port

60 MHz to 380 MHz	
Level $\leq$ +20 dBm to -15 dBm	$< \pm 0.50$ dB, $< \pm 0.15$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.85$ dB, $< \pm 0.50$ dB typical

380 MHz to 1325 MHz	
Level $\leq$ +20 dBm to -15 dBm	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.85$ dB, $< \pm 0.50$ dB typical

1325 MHz to 2700 MHz	
Level $\leq$ +20 dBm to -15 dBm	$< \pm 0.50$ dB, $< \pm 0.15$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.90$ dB, $< \pm 0.45$ dB typical

2700 MHz to 3900 MHz	
Level $\leq$ +20 dBm to -15 dBm	$< \pm 0.70$ dB, $< \pm 0.25$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical
Level $\leq$ -80 dBm to -110 dBm	$< \pm 1.10$ dB, $< \pm 0.55$ dB typical

3900 MHz to 6000 MHz	
Level $\leq$ +20 dBm to -15 dBm	$< \pm 0.65$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 1.0$ dB, $< \pm 0.50$ dB typical
Level $\leq$ -80 dBm to -100 dBm	$< \pm 1.10$ dB, $< \pm 0.60$ dB typical

## Option M9420A-HDX, half duplex port

60 MHz to 380 MHz	
Level $\leq$ +5 dBm to -15 dBm	$< \pm 0.55$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.50$ dB, $< \pm 0.25$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.80$ dB, $< \pm 0.40$ dB typical

380 MHz to 1325 MHz	
Level $\leq$ +5 dBm to -15 dBm	$< \pm 0.55$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.50$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.85$ dB, $< \pm 0.45$ dB typical

1325 MHz to 2700 MHz	
Level $\leq$ +5 dBm to -15 dBm	$< \pm 0.55$ dB, $< \pm 0.15$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.75$ dB, $< \pm 0.35$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.95$ dB, $< \pm 0.45$ dB typical

2700 MHz to 3900 MHz	
Level $\leq$ +5 dBm to -15 dBm	$< \pm 0.65$ dB, $< \pm 0.15$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.65$ dB, $< \pm 0.30$ dB typical
Level $\leq$ -80 dBm to -110 dBm	$< \pm 1.10$ dB, $< \pm 0.55$ dB typical

3900 MHz to 6000 MHz	
Level $\leq$ +5 dBm to -15 dBm	$< \pm 0.70$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.90$ dB, $< \pm 0.45$ dB typical
Level $\leq$ -80 dBm to -100 dBm	$< \pm 1.10$ dB, $< \pm 0.50$ dB typical

## Option M9420A-FDX, full duplex port

60 MHz to 380 MHz	
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.55$ dB, $< \pm 0.25$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.80$ dB, $< \pm 0.40$ dB typical

380 MHz to 1325 MHz	
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.65$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.80$ dB, $< \pm 0.45$ dB typical

1325 MHz to 2700 MHz	
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.65$ dB, $< \pm 0.20$ dB typical
Level $\leq$ -80 dBm to -120 dBm	$< \pm 0.85$ dB, $< \pm 0.50$ dB typical

2700 MHz to 3900 MHz	
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.70$ dB, $< \pm 0.30$ dB typical
Level $\leq$ -80 dBm to -110 dBm	$< \pm 1.0$ dB, $< \pm 0.45$ dB typical

3900 MHz to 6000 MHz	
Level $\leq$ -15 dBm to -80 dBm	$< \pm 0.80$ dB, $< \pm 0.30$ dB typical
Level $\leq$ -80 dBm to -100 dBm	$< \pm 1.0$ dB, $< \pm 0.35$ dB typical

<b>Setting resolution</b>		
	0.01 dB	
<b>Output voltage standing wave ratio (VSWR)</b>		
RF output port (in specified frequencies)		
60 to 600 MHz	< 1.6:1 nominal	
600 MHz to 2.8 GHz	< 1.5:1 nominal	
2.8 to 5 GHz	< 1.6:1 nominal	
5 to 6 GHz	< 1.9:1 nominal	
Option M9420A-HDX, half duplex port (configured to output mode in specified frequencies)		
60 MHz to 2.9 GHz	< 1.5:1 nominal	
2.9 to 6 GHz	< 2.0:1 nominal	
Option M9420A-FDX, full duplex port (configured to output mode in specified frequencies)		
60 MHz to 2.9 GHz	< 1.5:1 nominal	
2.9 to 6 GHz	< 1.6:1 nominal	
<b>Harmonics and spurious</b>		
RF output port; harmonics and sub-harmonics		
+10 dBm output power	< -40 dBc nominal	
Option M9420A-HDX, half duplex port; harmonics and sub-harmonics		
+0 dBm output power	< -40 dBc nominal	
Option M9420A-FDX, full duplex port; harmonics and sub-harmonics		
-15 dBm output power	< -40 dBc nominal	
<b>All ports; non-harmonic spurious (CW mode, specified frequency ranges)</b>		
60 MHz to 3.8 GHz	< -62 dBc nominal	
3.8 to 6 GHz	< -58 dBc nominal	
<b>Phase noise</b>		
Option M9420A-FDX, full duplex port, -5 dBm; Option M9420A-HDX, half duplex port, +5 dBm; RF output port, +15 dBm, CF = 900 MHz		
10 kHz offset	≤ -106 dBc, -112 dBc typical	
100 kHz offset	≤ -109 dBc, -113 dBc typical	
1 MHz offset	≤ -128 dBc, -134 dBc typical	
10 MHz offset	≤ -131 dBc, -135 dBc typical	
<b>Broadband noise floor</b>		
RF output port	Output level = +18 dBm	Output level = -30 dBm
60 MHz to 3.5 GHz	-125 dBm, typical	-159 dBm, typical
3.5 to 5.5 GHz	-120 dBm, typical	-161 dBm, typical
5.5 to 6 GHz	-114 dBm, typical	-156 dBm, typical
Option M9420A-HDX, half duplex port	Output level = +5 dBm	Output level = -30 dBm
60 to 380 MHz	-128 dBm, typical	-159 dBm, typical
380 MHz to 5.5 GHz	-130 dBm, typical	-160 dBm, typical
5.5 to 6 GHz	-124 dBm, typical	-158 dBm, typical
Option M9420A-FDX, full duplex port	Output level = -15 dBm	Output level = -30 dBm
60 to 380 MHz	-147 dBm, typical	-160 dBm, typical
380 MHz to 3.5 GHz	-151 dBm, typical	-159 dBm, typical
3.5 to 5.5 GHz	-152 dBm, typical	-161 dBm, typical
5.5 to 6 GHz	-146 dBm, typical	-158 dBm, typical

## General Specifications

Environmental characteristics	
Operating temperature	+5 to +45 °C
Storage temperature	-40 to +70 °C
EMC	Complies with European EMC Directive 2004/108/EC <ul style="list-style-type: none"> <li>- IEC/EN 61326-1</li> <li>- CISPR Pub 11 Group 1, class A</li> <li>- AS/NZS CISPR 11</li> <li>- ICES/NMB-001</li> </ul> This ISM device complies with Canadian ICES-001
Environmental stress	Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.
Safety	<ul style="list-style-type: none"> <li>- Complies with European Low Voltage Directive 2006/95/EC</li> <li>- IEC/EN 61010-1</li> <li>- Canada: CSA C22.2 No. 61010-1-04</li> <li>- USA: UL Std. 61010-1</li> </ul>
Power requirement	
Power drawn from chassis	≤ 120 W
Weight	
Net	1.6 kg (3.6 lbs)
Shipping	3.8 kg (8.4 lbs)
Dimensions	
Height	130 mm (5.1 in)
Width	82 mm (3.2 in)
Length	209.5 mm (8.25 in)
Calibration cycle	
The recommended calibration cycle is two year; calibration services are available through Keysight service centers	

## Front Panel

Ref In	
Connector	SMB male, 50 Ω nominal
RF connections	
RF Input	SMA female, 50 Ω nominal
RF Output	SMA female, 50 Ω nominal
RFHD	SMA female, 50 Ω nominal
RFFD	SMA female, 50 Ω nominal
Trigger connections	
Trigger In 1, Trigger In 2	Connector: SMB male Impedance: 10 kΩ nominal Trigger level range: -3.5 to +3.5 V
Trigger Out 1, Trigger Out 2	Connector: SMB male Impedance: 50 Ω nominal Trigger level range: 3.3 V LVTTTL

## System Requirements

Operating system	Windows 7 (32 & 64 bit)
Processor speed	1.86 GHz minimum, 2.4 GHz recommended
Available memory	4 GB minimum 8 GB recommended
Available disk space	4 GB
Video	Support for DirectX 9 graphics with 128 MB graphics recommended (SuperVGA supported)
Browser	Microsoft Internet Explorer 7.0 or greater

## Application Specifications

### N9071A GSM/EDGE/Evo measurement application key specifications<sup>1</sup>

#### Power versus time (PvT)

Absolute power accuracy ± 0.36 dB nominal at 0 dBm input power

#### Phase error (GMSK modulation)

Phase error

Average floor 0.30° typical at 0 dBm input power

Peak floor 0.85° typical at 0 dBm input power

#### EDGE error vector magnitude (EVM)

EVM

RMS floor 0.65% typical at 0 dBm input power

Peak floor 2.0% typical at 0 dBm input power

#### Output RF spectrum (ORFS for GMSK and 8PSk modulation)

Residual relative power, spectrum due to modulation

Offset frequency

600 kHz -70 dBc typical at 0 dBm input power

1.2 MHz -75 dBc typical at 0 dBm input power

1.8 MHz -73 dBc typical at 0 dBm input power

Residual relative power, spectrum due to switching

Offset frequency

600 kHz -67 dBc typical at 0 dBm input power

1.2 MHz -74 dBc typical at 0 dBm input power

1.8 MHz -76 dBc typical at 0 dBm input power

1. For frequencies from 450 to 490 MHz, 820 to 820 MHz, and 1710 to 1910 MHz



## GSM/EDGE/Evo source key specifications<sup>1</sup>

<b>Signal quality (RF output port: +15 dBm, Half duplex port: 0 dBm, Full duplex port: -15 dBm)</b>						
<b>Phase error (GMSK)</b>						
RMS	< 0.3° nominal					
Peak	< 2.0° nominal					
<b>EVM (EDGE)</b>						
RMS	< 1% nominal					
<b>Output RF spectrum (ORFS)</b>						
Residual relative power, spectrum due to modulation						
<b>Offset</b>	<b>GSM, nominal Half duplex/RF output (0 dBm)</b>	<b>Full duplex (-10 dBm)</b>	<b>Full duplex (-15 dBm)</b>	<b>EDGE, nominal Half duplex/RF output (0 dBm)</b>	<b>Full duplex (-10 dBm)</b>	<b>Full duplex (-15 dBm)</b>
200 kHz	-35 dBc	-35 dBc	-35 dBc	-36 dBc	-36 dBc	-36 dBc
400 kHz	-68 dBc	-68 dBc	-68 dBc	-68 dBc	-68 dBc	-68 dBc
600 kHz	-76 dBc	-76 dBc	-76 dBc	-76 dBc	-76 dBc	-75 dBc
1200 kHz	-81 dBc	-81 dBc	-77 dBc	-81 dBc	-81 dBc	-77 dBc
1800 kHz	-77 dBc	-77 dBc	-73 dBc	-76 dBc	-76 dBc	-72 dBc

1. For frequencies from 380 to 490 MHz, 695 to 960 MHz, and 1425 to 2180 MHz

## N9073A W-CDMA/HSPA+ measurement application key specifications<sup>1</sup>

<b>Channel power</b>	
Absolute power accuracy	± 0.36 dB nominal at 0 dBm input power
<b>QPSK EVM</b>	
Residual EVM	0.85% typical at -10 dBm input power
<b>Adjacent channel leakage ratio (ACLR) and adjacent channel power ratio (ACPR)</b>	
Residual relative power in 3.84 MHz BW 5 MHz offsets	-65 dBc typical at 0 dBm input power
<b>Spectrum Emission Mask (SEM)</b>	
Residual relative power	
2.515 MHz to 3.485 MHz offsets	-80 dBc in a 30 kHz BW typically at 0 dBm input power
4 MHz to 7.5 MHz offsets	-65 dBc in a 1 MHz BW typically at 0 dBm input power
7.5 MHz to 8.5 MHz offsets	-70 dBc in a 1 MHz BW typically at 0 dBm input power
8.5 MHz to 12 MHz offsets	-70 dBc in a 1 MHz BW typically at 0 dBm input power

1. For frequencies from 695 MHz to 920 MHz and specified ranges from 1425 MHz to 2700 MHz

## W-CDMA/HSPA+ source key specifications<sup>1</sup>

**Signal quality (RF output port: +15 dBm, Half duplex port: 0 dBm, Full duplex port: -15 dBm)**

<b>Composite EVM</b>	
RMS	< 1% nominal
Adjacent channel leakage ratio (ACLR)	

Offset	Port power level configuration	Frequency (MHz)	RF output/Half duplex 0 dBm nominal (dB)	Full duplex -15 dBm nominal (dB)
Adjacent 5 MHz	1 DPCH 1 carrier	900	-70	-72
Adjacent 10 MHz			-71	-72
Adjacent 5 MHz	64 DPCH 1 carrier	900	-70	-70
Adjacent 10 MHz			-71	-72
Adjacent 5 MHz	1 DPCH 1 carrier	1800 to 2200	-70	-72
Adjacent 10 MHz			-71	-72
Adjacent 5 MHz	64 DPCH 1 carrier	1800 to 2200	-70	-70
Adjacent 10 MHz			-71	-72
Adjacent 5 MHz	1 DPCH 1 carrier	1800 to 2200	-69	-71
Adjacent 10 MHz			-71	-72

1. For frequencies from 695 MHz to 960 MHz, and 1425 MHz to 2180 MHz

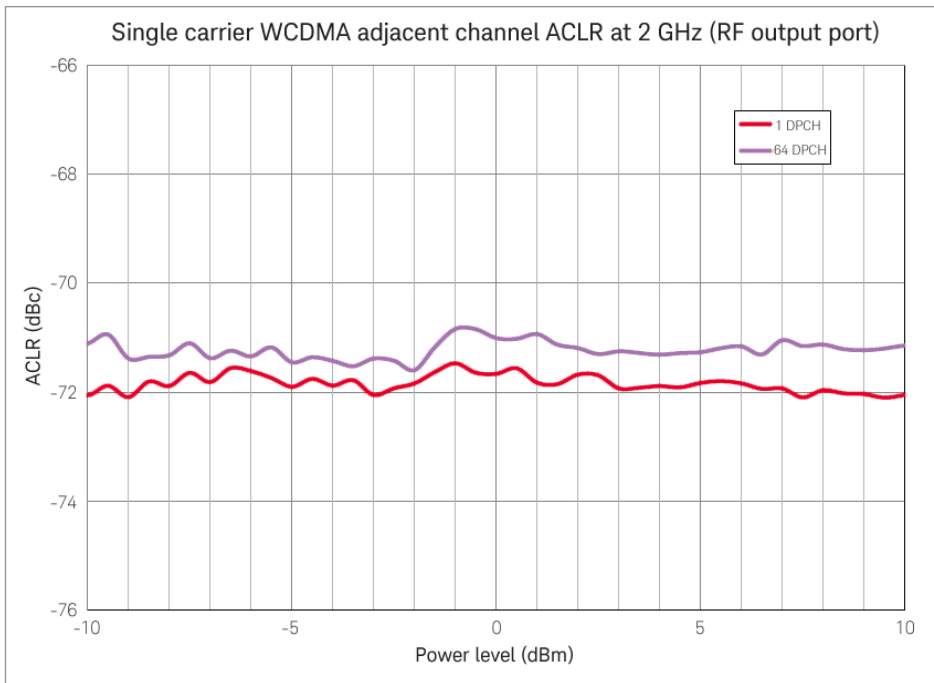


Figure 2. Single carrier W-CDMA adjacent channel ACLR versus power level at 2 GHz, RF output port

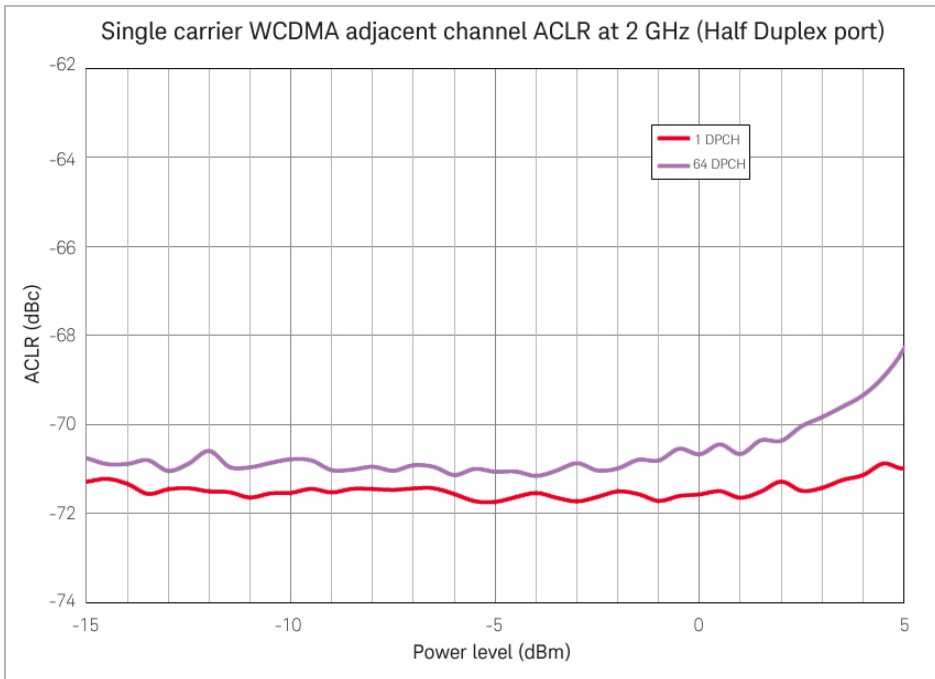


Figure 3. Single carrier W-CDMA adjacent channel ACLR versus power level at 2 GHz, half duplex port

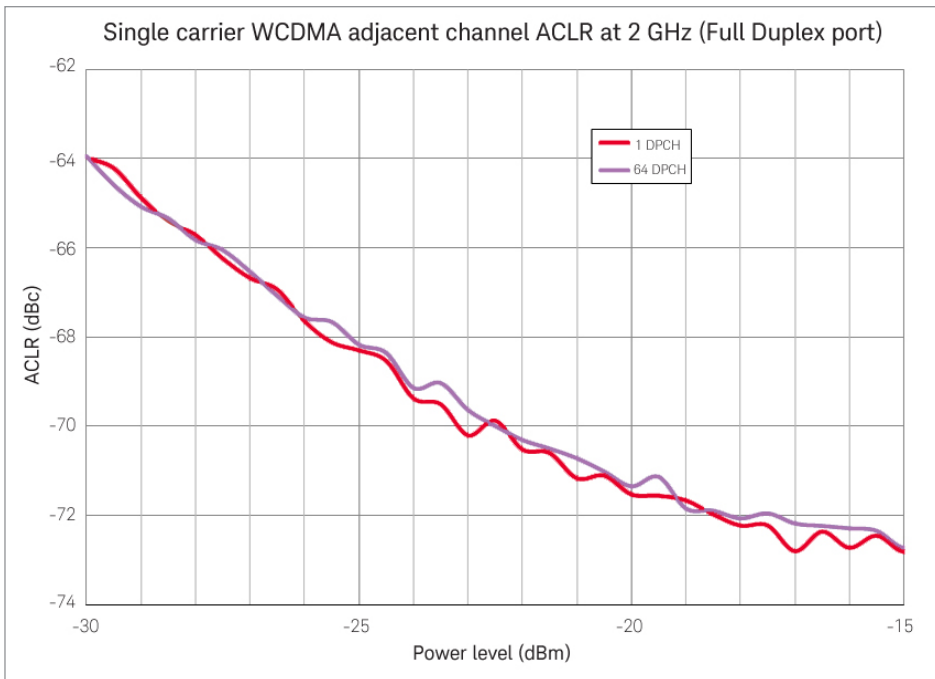


Figure 4. Single carrier W-CDMA adjacent channel ACLR versus power level at 2 GHz, full duplex port

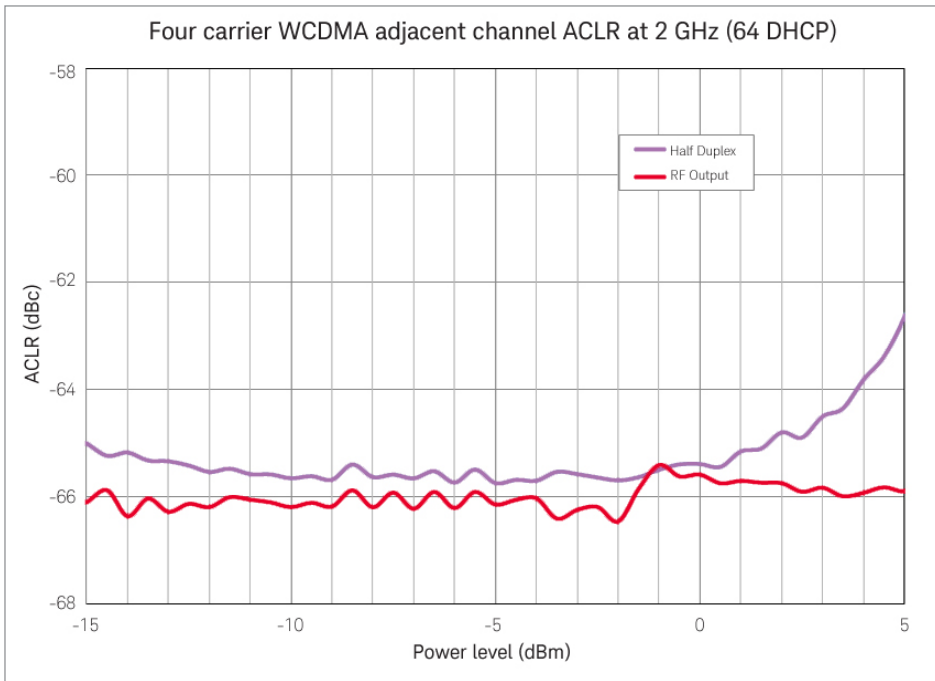


Figure 5. Four carrier W-CDMA adjacent channel ACLR versus power level at 2 GHz, RF output port and half duplex port

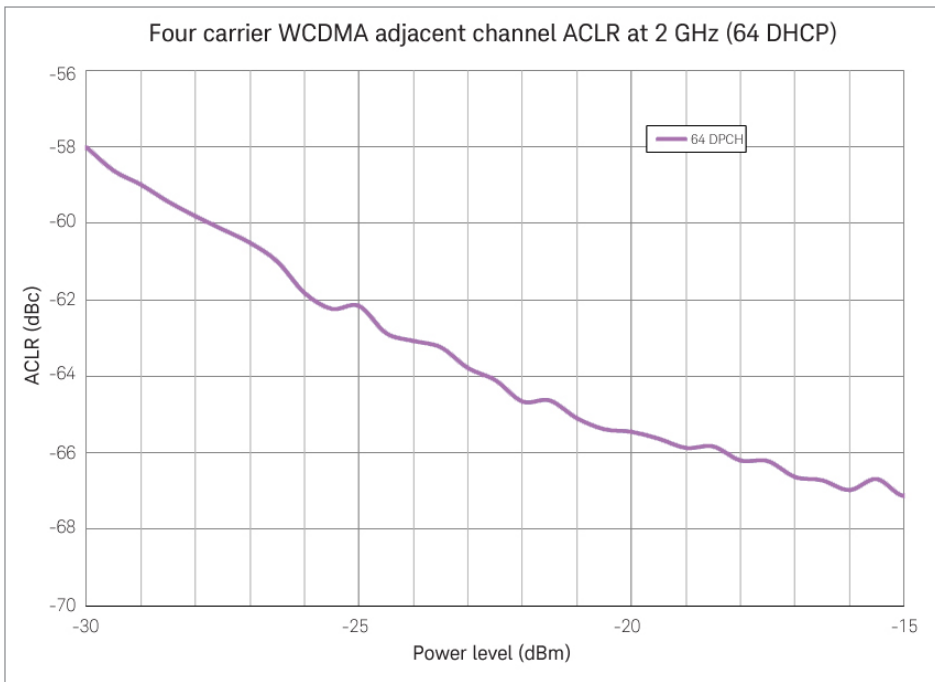


Figure 6. Four carrier W-CDMA adjacent channel ACLR versus power level at 2 GHz, full duplex port

## N9072A cdma2000 Measurement Application and N9076A 1xEV-DO Measurement Application Key Specifications<sup>1</sup>

<b>Channel power</b>	
Absolute power accuracy	± 0.36 dB nominal at 0 dBm input power
<b>Error vector magnitude (EVM)</b>	
Residual EVM	0.85% typical at -10 dBm input power
<b>Adjacent channel power (ACP)</b>	
Residual relative power in 30 kHz BW	
885 kHz offsets	-71 dBc typical at 0 dBm input power
1.98 MHz offsets	-83 dBc typical at 0 dBm input power
4.0 MHz offsets	-82 dBc typical at 0 dBm input power

1. For frequencies from 410 MHz to 484 MHz, 776 MHz to 920 MHz, and 1710 to 1980 MHz

## cdma2000 and 1xEV-DO Source Key Specifications<sup>1</sup>

<b>Signal quality (RF output port: +15 dBm, half duplex port: 0 dBm, full duplex port: -15 dBm)</b>	
<b>Composite EVM</b>	
RMS	< 1.1% nominal

1. For frequencies from 380 MHz to 490 MHz, 695 MHz to 960 MHz, and 1425 MHz to 2180 MHz

## N9080B LTE/LTE-Advanced FDD & N9082B LTE/LTE-Advanced TDD Measurement Application Key Specifications<sup>1</sup>

<b>Transmit power</b>	
Absolute power accuracy	± 0.36 dB nominal at 0 dBm input power
<b>Error vector magnitude (EVM)</b>	
<b>Residual EVM</b>	
5 MHz, 10 MHz, 15 MHz, 20 MHz BW	0.8% typical at -10 dBm input power
<b>Adjacent channel power</b>	
Minimum carrier power at RF input	
RF input port	-20 dBm
Half duplex port	-20 dBm
Full duplex port	-5 dBm
<b>Dynamic range</b>	
E-UTRA	-58 dBc nominal
UTRA	-60 dBc nominal

1. For specified frequency ranges between 695 and 3800 MHz

## LTE Source Key Specifications<sup>1</sup>

### Signal quality (RF output port: +15 dBm, half duplex port: 0 dBm, full duplex port: -15 dBm)

#### Composite EVM

RMS < 1.1% nominal

Adjacent channel power (ACP)

	Adjacent, nominal		Alternate, nominal	
	RF output/half duplex (0 dBm)	full duplex (-15 dBm)	RF output/half duplex (0 dBm)	full duplex (-15 dBm)
900 MHz	-64	-65	-64	-65
2 GHz	-65	-66	-65	-66

1. For specified frequency ranges between 695 and 3800 MHz

## N9081A Bluetooth Measurement Application Key Specifications<sup>1</sup>

### Transmit power

Absolute power accuracy  $\pm 0.26$  dB nominal at 0 dBm input power

### Modulation characteristics

Deviation range  $\pm 250$  kHz nominal

### EDR modulation accuracy

Range (rms DEVM) 0 to 12% nominal

Floor 0.6% typical at -20 dBm input power

1. Specifications apply for frequencies between 2400 and 2486 MHz.

## Bluetooth Source Key Specifications<sup>1</sup>

### Bluetooth signal using Signal Studio waveform

Basic Data Rate (ACL)

FSK error at -10 dBm at half duplex port or RF output port 0.65% nominal, DH1 packet, GFSK, standard packet, 2402 MHz

Enhanced Data Rate

ACP for -10 dBm signal at half duplex port or RF output port 3-DH1 packet, GFSK +D8PSK, standard packet, 2402 MHz  
-69 dBm nominal, k=2;  
-72 dBm nominal, k= 3, 4, 5, ...78

EDR rms DEVM error < 1% nominal

1. For specified frequency ranges between 1620 and 2700 MHz

## N9079A TD-SCDMA Measurement Application Key Specifications<sup>1</sup>

<b>Channel power</b>	
Absolute power accuracy	± 0.36 dB nominal at 0 dBm input power
<b>Error vector magnitude (EVM)</b>	
Residual EVM, 1.6 MHz channel BW	0.75% typical at 0 dBm input power
<b>Adjacent channel leakage ratio (ACLR) and adjacent channel power ratio (ACPR)</b>	
Residual relative power in 1.28 MHz BW	
1.6 MHz offsets	-55 dBc typical at 0 dBm input power
3.2 MHz offsets	-70 dBc typical at 0 dBm input power
<b>Spectrum emission mask (SEM)</b>	
Residual relative power	
2.515 MHz to 3.485 MHz offsets	-54 dBc in a 30 kHz BW typical at 0 dBm input power
4 MHz to 7.5 MHz offsets	-68 dBc in a 1 MHz BW typical at 0 dBm input power
7.5 MHz to 8.5 MHz offsets	-71 dBc in a 1 MHz BW typical at 0 dBm input power

1. For specified frequency ranges between 1620 and 2700 MHz

## TD-SCDMA Source Key Specifications<sup>1</sup>

<b>Signal quality (RF output port: +15 dBm, half duplex port: 0 dBm, full duplex port: -20 dBm)</b>	
<b>Composite EVM</b>	
RMS	< 0.5% nominal

1. For specified frequency ranges between 1620 and 2700 MHz

## N9077A WLAN Measurement Application Key Specifications<sup>1</sup>

<b>Modulated Power</b>	
Absolute power accuracy	
2400 MHz to 2483.5 MHz	± 0.27 dB nominal at 0 dBm input power
5150 MHz to 5185 MHz	± 0.49 dB nominal at 0 dBm input power
<b>Error Vector Magnitude (EVM)</b>	
EVM floor conditions Phase Tracking on, pre-amble only, Half duplex port	
802.11b 2.4GHz	<-40.9 dB typical at -20 dBm input power
802.11g 2.4 GHz	<-47 dB typical at -20 dBm input power
802.11a 5.8 GHz	<-48 dB typical at -20 dBm input power
802.11n 5.8 GHz 20MHz	<-48 dB typical at -20 dBm input power
802.11n 5.8 GHz 40MHz	<-44 dB typical at -20 dBm input power
802.11ac 5.8 GHz 80 MHz	<-45 dB typical at -20 dBm input power
802.11ac 5.8 GHz 160 MHz	<-43 dB typical at -20 dBm input power
<b>SEM</b>	
802.11a/g at 2.4GHz with 20 MHz BW	See Figure 1
802.11a/g at 5.8 GHz with 20 MHz BW	See Figure 2
802.11n at 5.8 GHz with 40 MHz BW	See Figure 3
802.11ac at 5.8 GHz with 80 MHz BW	See Figure 4

1. SEM Transmitter test signal generated by Agilent N5182B MXG signal generator

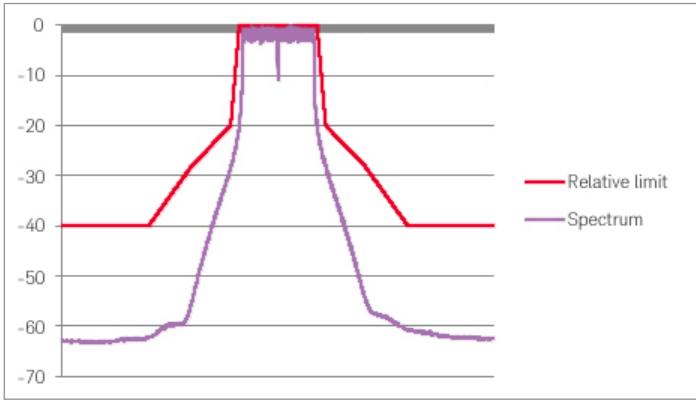


Figure 7. 802.11 a/g SEM nominal performance at 2.4 GHz with 20 MHz BW

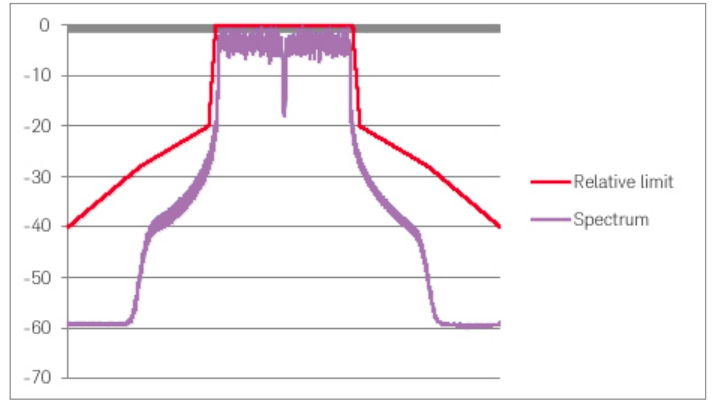


Figure 9. 802.11 n SEM nominal performance at 5.8 GHz with 40 MHz BW

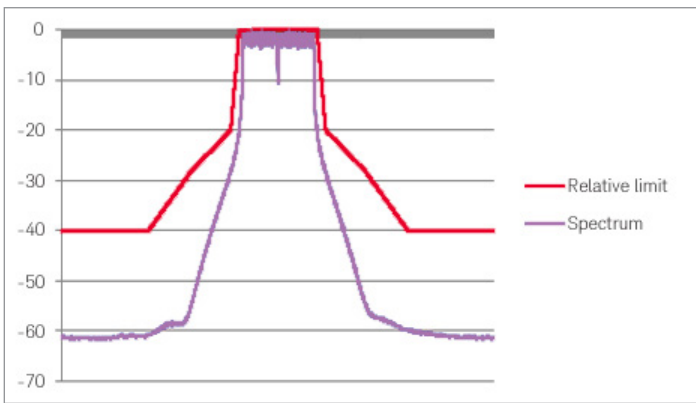


Figure 8. 802.11 a/g SEM nominal performance at 5.8 GHz with 20 MHz BW

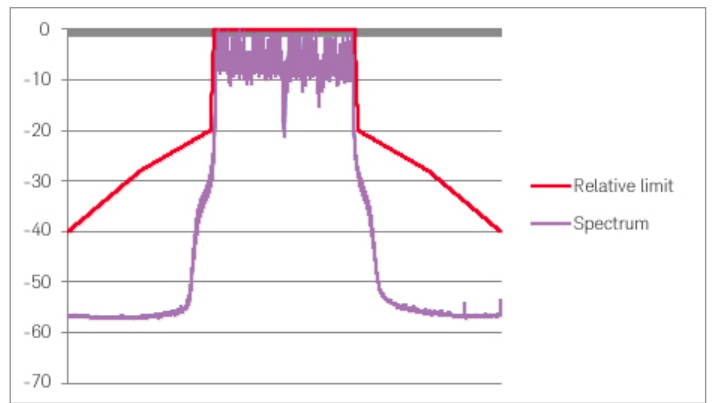


Figure 10. 802.11 ac SEM nominal performance at 5.8 GHz with 80 MHz BW



## WLAN Source Key Specifications

### Error Vector Magnitude (EVM)

Wireless LAN error vector magnitude (EVM Performance (using Signal Studio signal noted)) half duplex port, RF output port

802.11b 2.4GHz	<-28 dB typical (0 dBm to -30 dBm)
802.11a 5.8 GHz	<-44 dB typical (-5 dBm to -15 dBm)
802.11n 5.8 GHz 20MHz	<-43 dB typical (-5 dBm to -15 dBm)
802.11n 5.8 GHz 40MHz	<-44 dB typical (-5 dBm to -15 dBm)
802.11ac 5.57 GHz 80 MHz	<-42 dB typical (-5 dBm to -15 dBm)

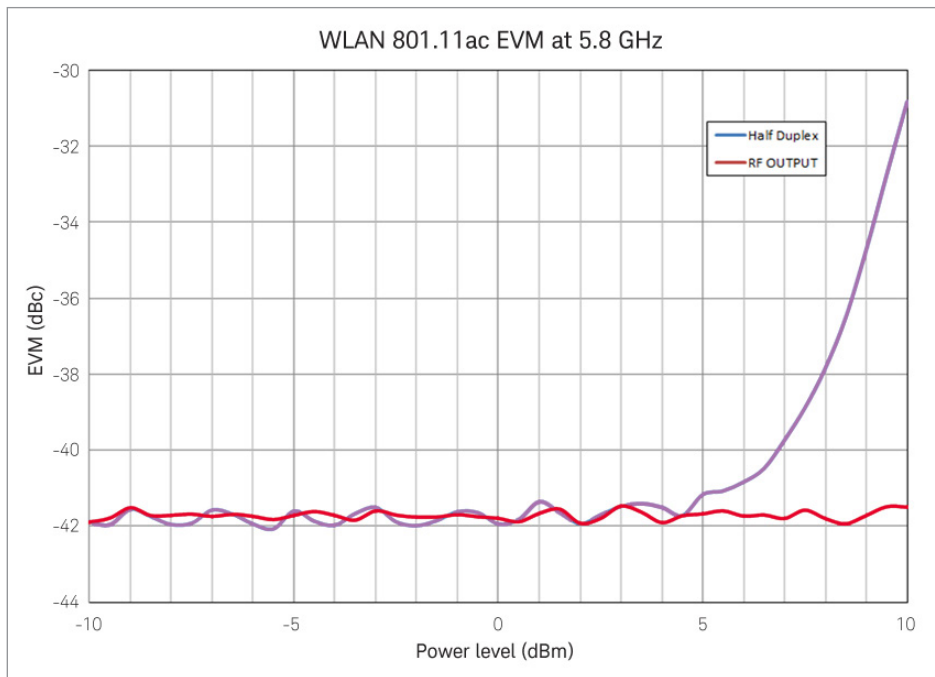


Figure 11. 802.11 ac EVM nominal performance versus power level at 5.8 GHz for 160 MHz signal bandwidth with equalization on the preamble

## Software

### Instrument connection software

Keysight I/O library



The I/O library suite offers a single entry point for connection to the most common instruments including AXIe, PXI, GPIB, USB, Ethernet/LAN, RS-232, and VXI test instruments from Keysight and other vendors. It automatically discovers interfaces, chassis, and instruments. The graphical user interface allows you to search for, verify, and update IVI instrument and soft front panel drivers for modular and traditional instruments. The IO suite safely installs in side-by-side mode with NI I/O software.

Free software download at [www.keysight.com/find/iosuite](http://www.keysight.com/find/iosuite)

### Module setup and usage

Keysight soft front panel



The VXT includes a soft front panel (SFP), a software-based graphical user interface (GUI) which enables the instrument's capabilities from your PC.

Included on CD-ROM shipped with module or online

### Module management

Keysight connection expert

Connection expert is the graphical user interface included in the I/O libraries suite that allows you to search for, verify and update IVI instrument and soft front panel drivers for modular and traditional instruments

Free software download at [www.keysight.com/find/iosuite](http://www.keysight.com/find/iosuite)

### Programming

Driver

IVI-COM

IVI-C

MATLAB

**Development environments**

Visual Studio (VB .NET, C#, C/C++), VEE,

LabVIEW, LabWindows/CVI, MATLAB

Included on CD-ROM shipped with module or online

### Programming assistance

Command expert




Assists in finding the right instrument commands and setting correct parameters. A simple interface includes documentation, examples, syntax checking, command execution, and debug tools to build sequences for integration in Excel, MATLAB, Visual Studio, and VEE.

Free software download at [www.keysight.com/find/commandexpert](http://www.keysight.com/find/commandexpert)

### Signal analysis software

X-Series measurement applications



Provides measurements for analog demodulation, noise figure, phase noise and others.

Licensed software. For more information, visit [www.keysight.com/find/x-series\\_apps](http://www.keysight.com/find/x-series_apps)

## Related Literature

Literature	Pub number
Product Fact Sheet	5992-1086EN
Configuration Guide	5992-1065EN
Data Sheet	5990-6583EN
Data Sheet	5991-3661EN
Data Sheet	5990-8465EN

## Web

Product page: [www.keysight.com/find/M9420A](http://www.keysight.com/find/M9420A)

X-Series measurement applications: [www.keysight.com/find/X-Series\\_Apps](http://www.keysight.com/find/X-Series_Apps)


For more information or literature resources please visit the web:

[www.keysight.com/find/vxt](http://www.keysight.com/find/vxt)

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

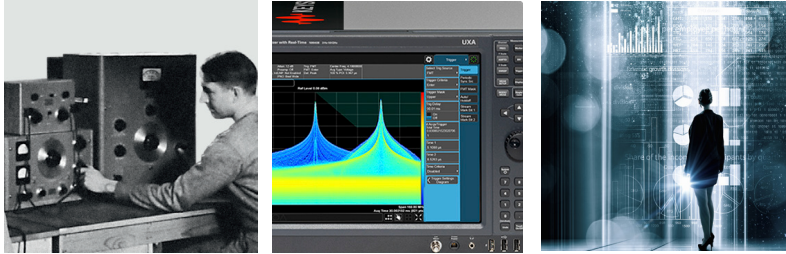

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus) (BP-9-7-17)



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

#### [www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

Accelerate Technology Adoption.  
Lower costs.

#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000 is a US registered certification mark of the Telecommunications Industry Association.

Bluetooth and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc., U.S.A. and licensed to Keysight Technologies, Inc.

[www.keysight.com/find/m9420a](http://www.keysight.com/find/m9420a)



Unlocking Measurement Insights

This information is subject to change without notice.  
© Keysight Technologies, 2017  
Published in USA, December 1, 2017  
5992-1088EN  
[www.keysight.com](http://www.keysight.com)